

Verbatim LED-plafondspot T8 G13, 1500 mm, 28 W, 2600 lm, 6500 K

- G13 Aansluiting
- 220-240V
- 40,000 Levensduur
- Lichtstroom: 2600 lm

Productnummer	52705
Algemene gegevens	
Lampfitting	G13
Ontwerp	T8 LED-buis
Elektrische gegevens	
Wattage (W)	28
Voltage (V)	220-240
Dimbaar	nee
Vermogensfactor	0.90
Werkingsfrequentie (Hz):	50-60
Geometrische gegevens	
Lengte (mm)	1513
Diameter (mm)	28 x 32
Gewicht (g)	420
Fotometrische gegevens	
Lichtstroom (lm)	2600
CRI	80
CCT (K)	6500
Stralingshoek (°)	120
Lichtrendement (lm/W)	92.86
Levensduur (hrs)	40,000
Schakelcyclus	100,000
Gebruikstemperatuur	-35 - 45°C




29/05/2015

Lifestyle image




Technical Drawings

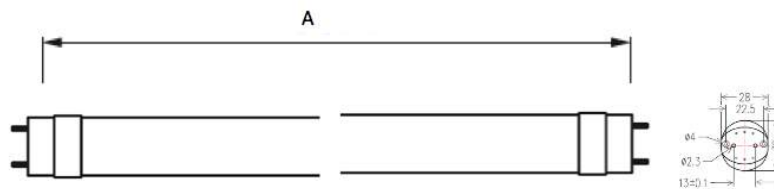

29/05/2015


Fotometrische diagrammen

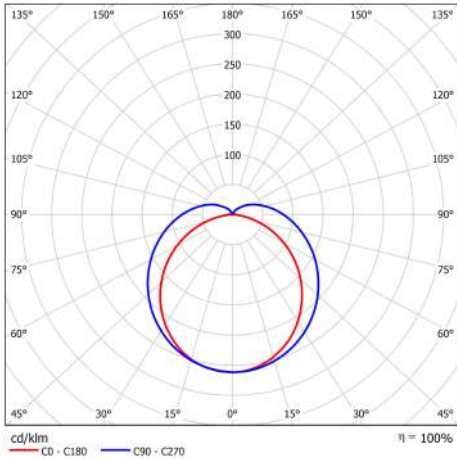

0.5	2.86 1.31	E(0°) E(C90) E(CD)	2710 70.7° 52.7°	49 302
1.0	5.71 2.63	E(0°) E(C90) E(CD)	70.7° 70.7° 52.7°	678 12 76
1.5	8.57 3.94	E(0°) E(C90) E(CD)	70.7° 70.7° 52.7°	301 5 34
2.0	11.42 5.25	E(0°) E(C90) E(CD)	70.7° 70.7° 52.7°	169 3 19
2.5	14.28 6.56	E(0°) E(C90) E(CD)	70.7° 70.7° 52.7°	108 2 12
3.0	17.13 7.88	E(0°) E(C90) E(CD)	70.7° 70.7° 52.7°	75 1 8

Distance [m] Cone Diameter [m] Illuminance [lx]
 — CD - C180 (Half-value Angle: 105.4°)
 — C90 - C270 (Half-value Angle: 141.4°)

Energieclassificatie

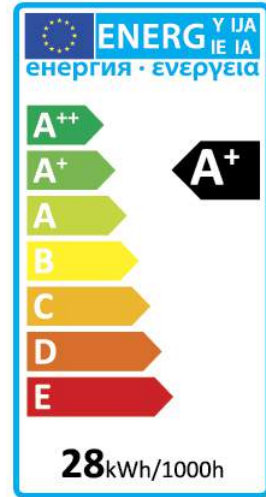

Verpakking (technisch) Details

Barcode

023942527053

EAN 128

(02)00023942527053(37)04(91)803

EAN 14

50023940527058

Afmetingen verpakking (HxBxL)

35 x 33 x 1595 (mm)

Gewicht van verpakking

580 (g)

**MINIMALE
BESTELHOEVEELHEID**

10

Afmetingen doos (HxBxL)

90 x 180 x 1595 (mm)

Dozen/pallet

36

Lagen/pallet

9

Eenheden/pallet

360

29/05/2015